




SleeveCutter



Features

- Servo-controlled material feed
- True color registration sensor
- Programmable cut-to-length
- Conveyor table with continuous or intermittent stacking
- Intuitive touchscreen controls with unlimited recipes
- Cross, T, and linear perforation options
- Magnetic particle brake unwind
- Easy-to-adjust cross perforation offset
- On-board drive based PAC Control
- Internet based remote diagnostic with WiFi capability

Stanford / Shrink Sleeve Label Cutter

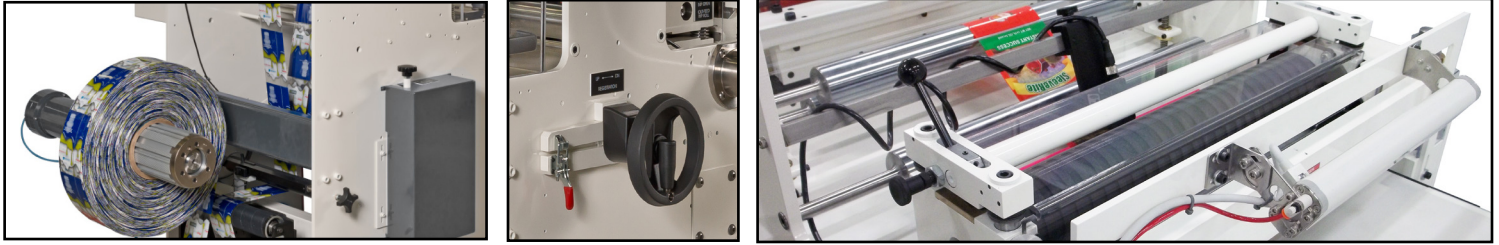

Designed specifically for the cutting/sheeting of shrink sleeve labels...


the SleeveCutter is designed for high-speed and low-waste finishing of shrink sleeves. With high-speed precision, the ability to perforate (linear, cross and shaped), and robust vibration-free construction, the SleeveCutter embodies the reliability and performance for which Stanford is known.

The servo-driven feed unit can perform programable cut-to-length cuts, or utilize a full-color registration sensor for precise label lengths.

Various perforation and punches are available on the SleeveCutter, as well as an optional rewinding unit which allows the SleeveCutter to rewind and oscillate rolls that have been perforated.

Accraply engineers a large selection of Stanford Doctor Machines®, a complete line of duplex differential slitter rewinders and shrink sleeve finishing equipment, as well as customized equipment.

Minimum Layflat Width	50 mm [2"]
Maximum Layflat Width	400 mm [15.75"]
Maximum Label Length	400 mm [15.75"]
Maximum Web Speed*	400 cuts per minute at 50 mm (2")
Maximum Unwind Diameter	610 mm [24"]
Machine Options	Rewinding Unit Linear Perforation Cross Perforation T-Perforation Air Relief Punch Web Guide

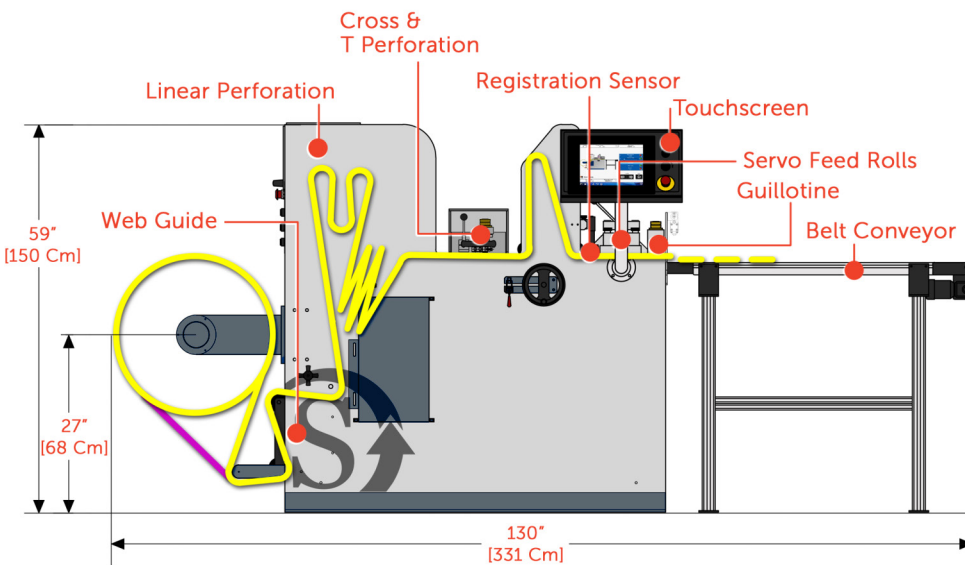

* Max speed is a function of the material characteristics (including COF, coatings, ink adhesion, curing, and drying), gauge bands, tension and web width.

Accraply

Trine

Stanford

Graham

Sleevit

Accraply
3580 Holly Lane North
Plymouth MN 55447-1269 USA

t. +1 (763) 557-1313
accraply.com

