




Beverage Can Sleeving Solution

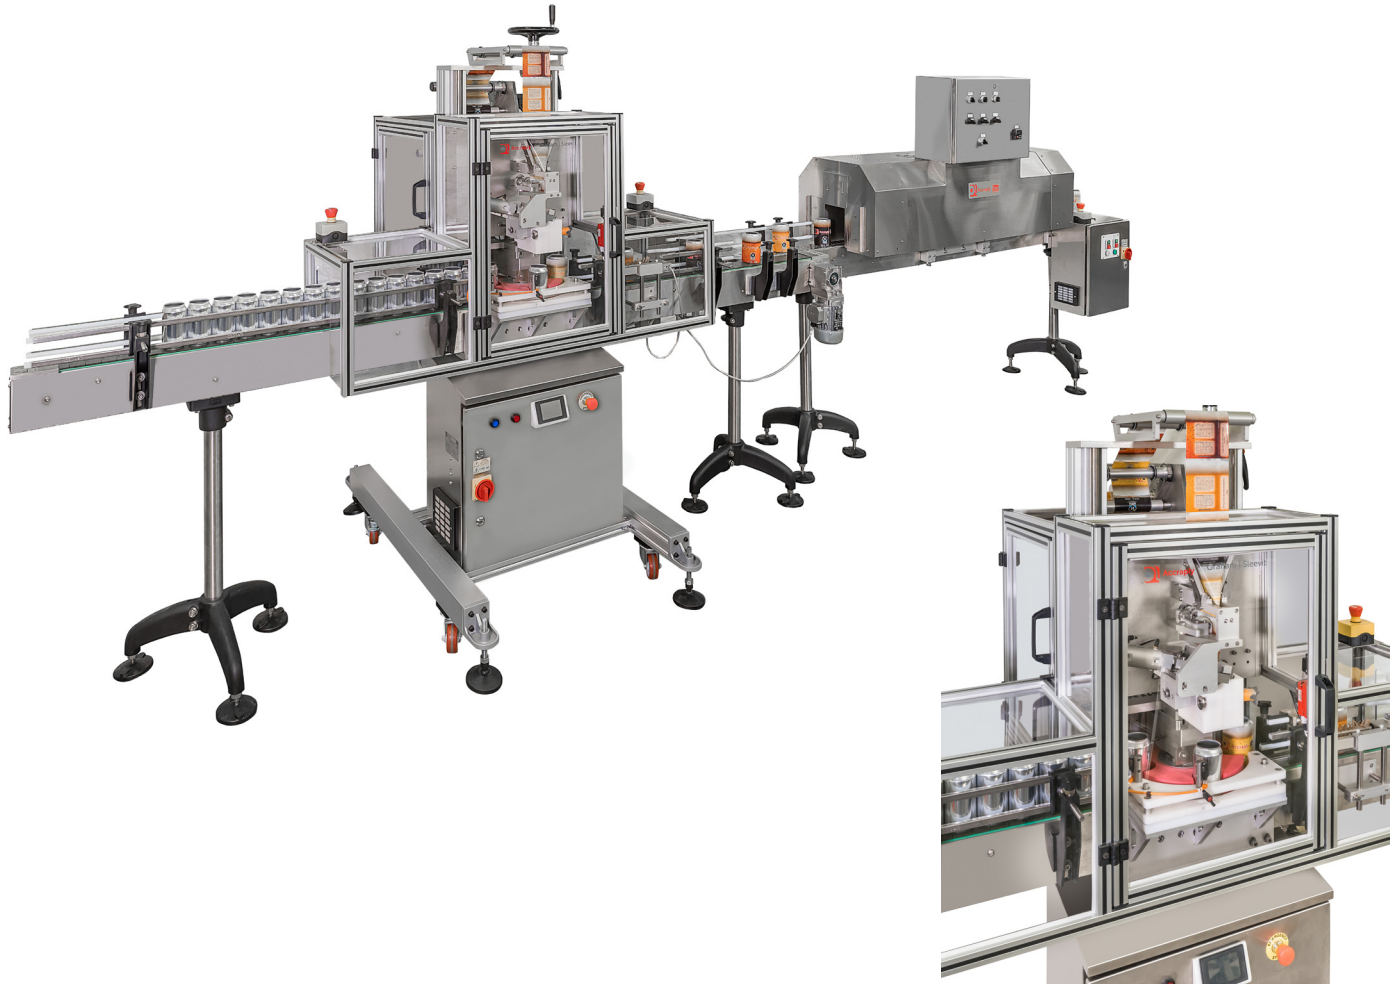

Features

- Exclusive Former Box technology
- Grows with your business - can be purchased in modules or as a complete solution
- Package includes applicator, tunnel(s), and conveyor
- Fully integrated system with pitching, line control, product timing, and sleeve wipe down
- Fully enclosed and interlocked guarding as standard
- Provides greater operational flexibility
- Capable of speeds up to 80 CPM
- Includes tooling for 12 and 16 oz cans
- Easy to install, set up, and maintain
- Optional steam tunnel solution

Graham Sleeveit - Beverage Can Sleeve Applicator

The Beverage Can Sleeving Solution (BCSS) shrink sleeve labelling applicator combines innovation with functionality to create a fully-guarded, full body sleeve applicator that is both efficient and easy to operate. It encompasses all elements of container pitching, timing, sleeve application, and line control in a compact unit that is quick and easy to set up. The BCSS applicator is able to apply sleeves in register with the sleeve artwork, using our exclusive Former Box application technique to accurately form the sleeve opening and deliver it onto the container.

The BCSS's radiant tunnel features industrial grade insulation keeping the surface temperature safe and cool to the touch. The efficient design incorporates convection and radiant heat along with a super mirror finish inner shell to effectively transfer heat into the label.

This system provides breweries, mobile canners, and converters the opportunity to save thousands over current canning options. **In fact, this system is designed to have a one year payback.** Give your Operations the flexibility to run on demand with the Graham Sleeveit BCSS system by Accraply.

The BCSS applicator is suited for operations with the requirement to sleeve up to 80 containers per minute without comprising the quality or reliability of the application. This system has a completely modular design to grow with the demand of your business. Start with a tunnel and conveyor or purchase the entire system at once.

Custom application and shrinking systems are available to suit nearly any customer requirement. Accraply has over 40 years of in-depth experience in the container decoration field.



Conveyor Height min/max:	930 mm [36.61 inch]
Container Diameter:	2.6875 inch [12 & 16 oz cans]
Sleeve Length min/max:	123 mm & 156 mm [12 & 16 oz cans]
Maximum Speed:	Up to 80 cans per minute
Material Type	PVC, PET/PETG, OPS, PLA
Material Thickness	40 - 70 microns
Air	80 PSI, 5.5 Bar
Electrical:	120 VAC, 1-Phase, 10 Amp
Maximum Unwind Diameter:	350 mm [13.78 inch]
Unwind Core Diameter:	76.2 mm [3 inch] 127 mm [5 inch]

** All specification and tooling requirements are subject to Accraply evaluation of all label and product samples. Specifications shown reflect standard machine capabilities. Accraply can also meet other specification requirements. Please call for details.**

Accraply

Trine

Stanford

Graham

Sleevit

Harland

BW Packaging Solutions consist of Accraply, BW Container Systems, Design Group, Paper Converting Machine Company, Pneumatic Scale Angelus, Thiele Technologies and Synerlink. Through their diverse capabilities, these companies can collectively provide everything from a single piece of equipment to fully integrated, tailor-made packaging line solutions for a wide range of industries, including: food and beverage, personal care, container manufacturing, pharmaceutical and medical devices, household products, paper products and textiles, industrial and automotive, and converting, printing and publishing.

BWPackagingSolutions.com

barrywehmiller
bw
betterworld